

Zubri Patio Heater Assembly Instructions

From this....To this... In 5 Easy Steps

- Easy Storage
- Easy to Transport




1. Attach Legs

- Snap legs in place.
- Spread Leg stabilizer and attach to bottoms of legs.



2. Attach Reflector

- Remove reflector from case.
- Attach reflector onto threaded rod.
- Fold over special catch, securing reflector (Or place wing nut on the top and tighten).

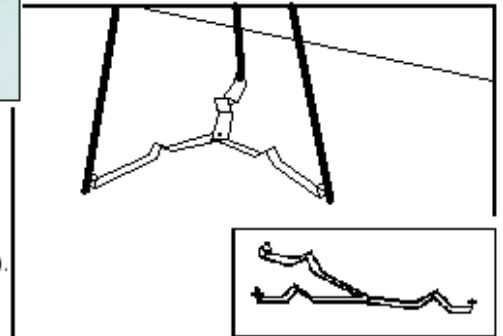

3. Propane Tank

- Place the propane tank onto the leg stabilizer.
- Attach hose to propane tank, tighten securely.
- Heater is now stabilized.




4. Attach Skirt

- Wrap skirt around heater legs to cover propane tank.
- Zip up and secure with velcro closure.



5. Light & Enjoy!

- Turn on gas at propane tank, opening the valve slowly.
- Hold match under burner head.
- Push and turn gas control knob to middle position.
- After heater lights, hold down control knob for 45 seconds, release slowly and adjust heat.



6. Clean up & Disassembly

- Turn the control knob to the off position.
- Wait at least 20 to 30 minutes for the heater to cool down.
- When the reflector is cool to the touch begin disassembly.
- Remove and fold the skirt that covers the legs, place it in the case.
- Turn off the gas on the propane tank, tighten the valve securely.
- Remove the hose from the tank, leaving the hose attached to the heater. Unhook the propane tank and set the tank aside.
- Tip the unit to the side and remove the reflector from the top by aligning the catch.
- Place the reflector in its carrying bag.
- Remove the leg brace and then the legs, place them in the side slots in the case.
- Finally place the central core of the unit in the travel case, everything should fit in and allow you to use the attached straps to secure the top and bottom halves.



TAYLOR RENTAL
We're more than just products at work.®

409 Goffle Road, Ridgewood, NJ 07450
(201)-447-0860

448 Broadway, Hillsdale, NJ 07642
(201)-664-0900